

P6 Mezz Deck T&G

Kronobuild® Mezz Deck is our heavy duty load-bearing mezzanine flooring board available in a 38 mm thickness. Suitable for use in dry conditions for commercial and industrial applications.



Characteristics

- Heavy duty load-bearing
- Simple processing with conventional woodworking tools
- Smooth surface
- Tongue and grooved 2 long edges for easy and flexible fixing

Applications

- Structural flooring
- Industrial and commercial use
- Commercial refurbishment
- Industrial racking and storage systems

Standard

EN 312 - type P6; EN 13501-1: class D-s1, d0
EN 13986:2004+A1:2015

Formaldehyde Class

E1

Dimensions (mm)	Profile	Thickness (mm)	Board per pack
2400 x 600	TG2	38	42

Production specification related to durability - P6 particleboard EN 312

Property	Test method	Unit	>32 to 40
Bending strength	EN 310	N/mm ²	14
Modulus of elasticity in bending	EN 310	N/mm ²	2200
Internal Bond	EN 319	N/mm ²	0.3
Swelling in thickness 24h	EN 317	%	14
Surface soundness	EN 311	N/mm ²	0,8
Density tolerance	EN 323	kg/m	+10
Moisture content	EN 322	%	5 - 13%
Thickness (at any point on the board)	–	kg/m	+3
Length & Width	–	kg/m	+5
Formaldehyde content	EN ISO 12460-5	mg/100 g	Class E1 (8mg/100g)



The mark of responsible forestry

Please contact us for more information.


Phone: 01691773361

Email: sales@kronospan.co.uk

kronospan
www.kronospan.com

Making Circularity a Reality

We strive for the lowest environmental impact by applying the principles of the circular economy - reduce, reuse, recycle for zero waste manufacturing.

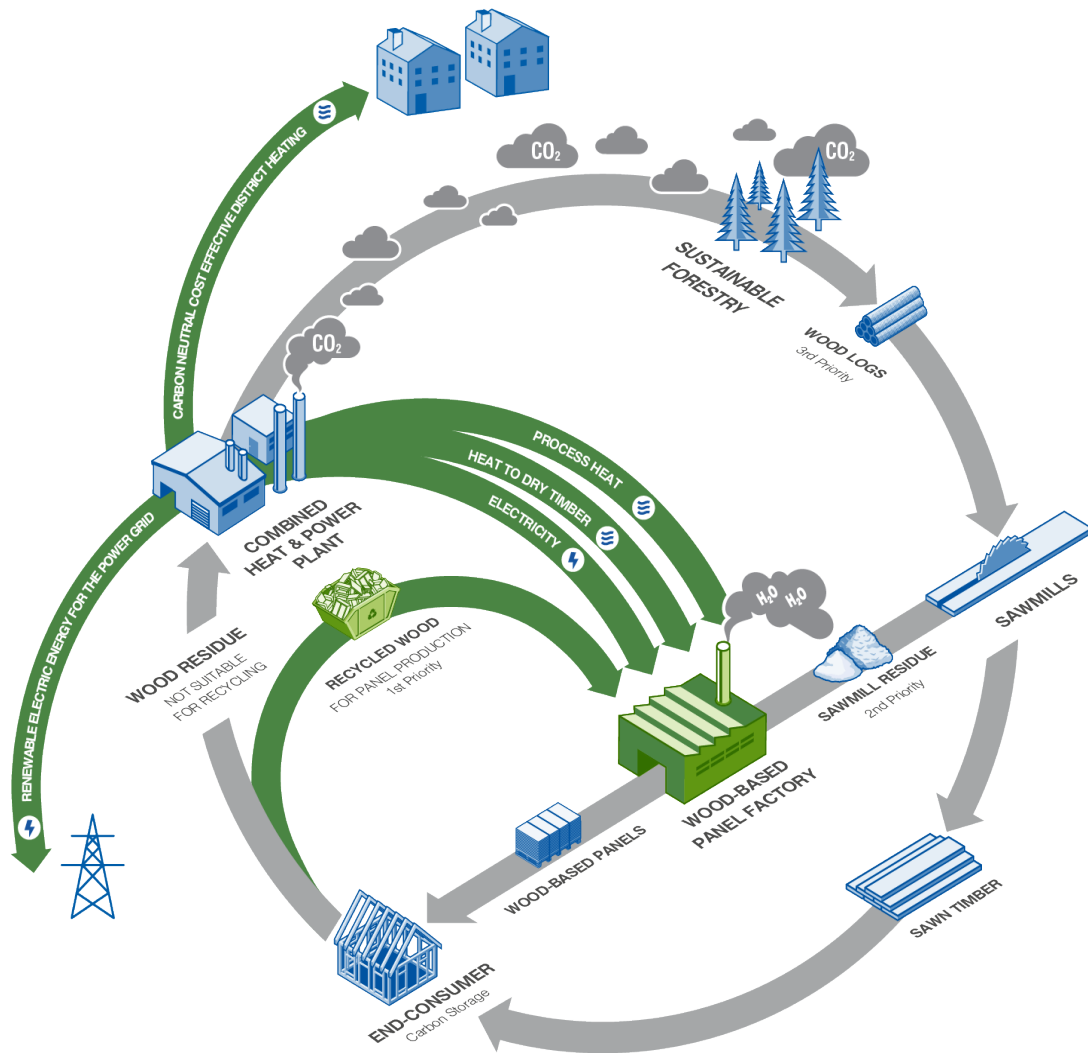

85%

Recycled wood content in our particleboard

CO₂ Negative

Carbon negative products available

100% recyclable

Becoming raw material for brand new products

1,700kg CO₂

Saving per 1000 miles by manufacturing in the UK